



MODERNIZED EVOLUTION STEEL DOOR

PROFESSIONAL DOOR ACCESSORIES



A1-A2

B1-B2

C5-C6

D1-D2

D3-D4

D5-D6

D7-D8



FD1-FD2

G1

H1

I1

K1



L1

Q1

R1

- Easy for **Installation** with any type of door frame
- Finishing by **Polyester Powder Coating**
- Door internal panels are injected with **Polyurethane Foam (Heat Durable and Sound Proof)**
- Door panels are made of **Zinc Electro Galvanized Steel**
- Steel frame made by roll forming process 1.5 mm thick
- **Knock Down System** door frame
- **Internal and External** use
- **NO termites**
- **NO insects**
- **NO swelling**
- **NO extension**

PROFESSIONAL DOOR COLORS

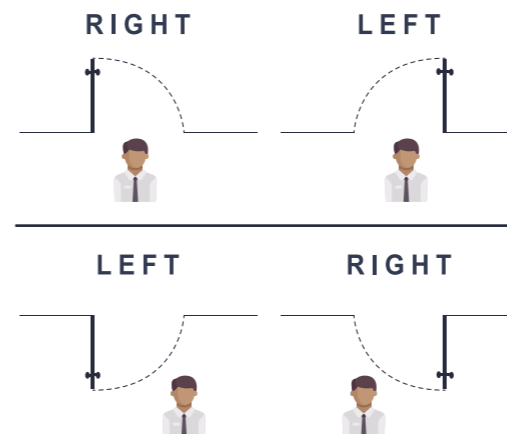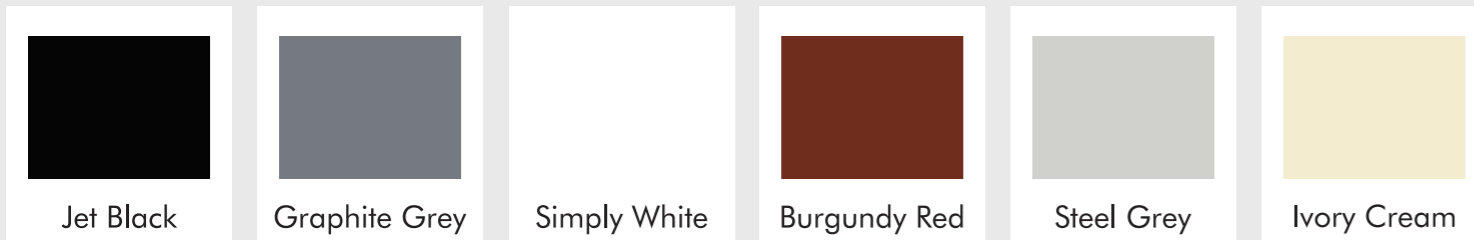




MODEL	TYPE	WIDTH (cm.)	HEIGHT (cm.)	WEIGHT (kg.)	MODEL	TYPE	WIDTH (cm.)	HEIGHT (cm.)	WEIGHT (kg.)
A1	PANEL	79.2	199.4	25	A2	PANEL	89.2	199.4	29
B1	PANEL	79.2	199.4	25	B2	PANEL	89.2	199.4	29
C5	PANEL	79.2	199.4	30	C6	PANEL	89.2	199.4	33
D1	PANEL	79.2	199.4	36	D2	PANEL	89.2	199.4	39
D3	PANEL	79.2	199.4	32	D4	PANEL	89.2	199.4	35
D5	PANEL	79.2	199.4	35	D6	PANEL	89.2	199.4	38
D7	PANEL	79.2	199.4	35	D8	PANEL	89.2	199.4	38
G1	PANEL	79.2	199.4	25	H1	PANEL	79.2	199.4	25
I1	PANEL	79.2	199.4	25	K1	PANEL	79.2	199.4	25
L1	PANEL	79.2	199.4	25	Q1	PANEL	79.2	199.4	25
R1	PANEL	79.2	199.4	25	F1	FRAME	86.4	203.5	12
FR1	FRAME	86.4	203.5	12	FR2	FRAME	96.4	203.5	13
FD1	PANEL	79.2	199.4	56	FD2	PANEL	89.2	199.4	62
FFD1	FRAME	86.4	204.8	14	FFD2	FRAME	96.4	204.8	15
D1-38	PANEL	79.2	199.4	25	D1-40	PANEL	79.2	199.4	25
D1-41	PANEL	79.2	199.4	25	FR1	FRAME	86.4	203.5	12

Interior-Exterior Steel Door

Product Attribute


- Made of Zinc Electro Galvanized steel sheet thickness of 0.6 mm. Door thickness 35 mm.
- Door Frame made of Zinc Electro Galvanized steel sheet thickness of 1.5mm. with knockdown feature.
- Inside Door Panel Polyurethane Foam insulation
- Finishing by Polyester Powder coating
- Stainless Steel Hinge 5"x4"x3 mm. Grade 304
- Steel door with glass and louver available for installation

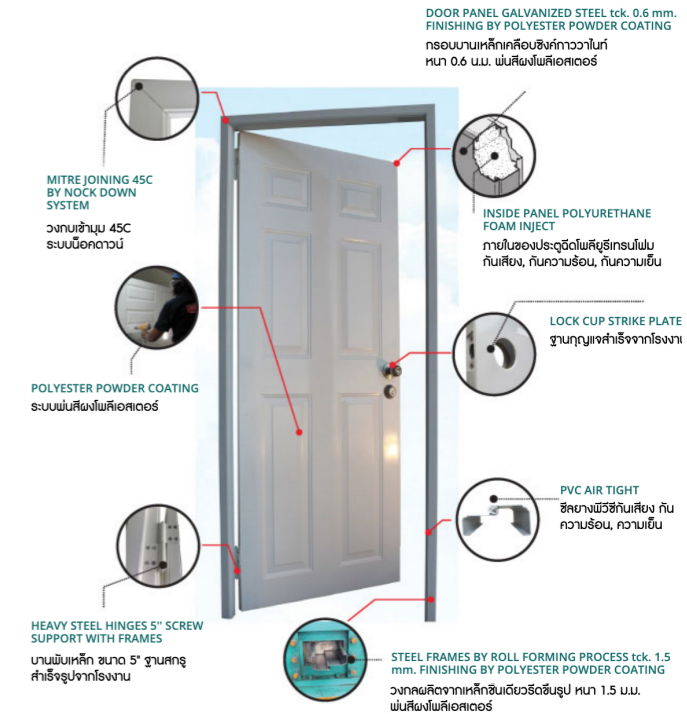

Fire-Proof Steel Door

Product Attribute

- Made of Zinc Electro Galvanized steel sheet thickness of 1.5 mm. Door thickness 35 mm.
- Door Frame made of Zinc Electro Galvanized steel sheet thickness of 1.5mm. with knockdown feature.
- Inside Door panel Rock Wool Insulation density of 100 kg/m3
- Heat Resistance up to 1000 C°
- Finishing by Polyester Powder coating
- Stainless Door Sill Grade 304 Thickness of 1.5 mm
- Stainless Steel Hinge 5"x4"x3 mm. Grade 304
- Ceramic Fibre at all door sides for smoke sealing

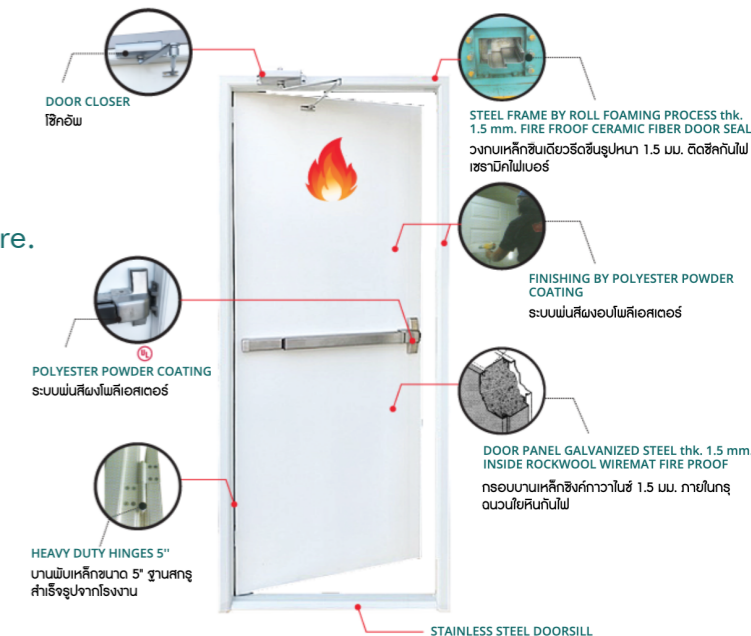

MERCAN STEEL (2008) CO., LTD.
888/18 Sukhumvit Road T.Bangpoomai
A.Mueng Samutprakarn 10280
Tel. +66223232668-70 | Fax. +66223232670
mercansteel2008@gmail.com
www.mercanprofessionaldoor.com